

Drawing to be read in conjunction with the design calculations. The Precaster Manufacturer is Responsible for the Manufacture of the units to the provided design and shop drawings. The Installation Contractor is Responsible for the Installation of the Precast and for all Temporary Works, Method Statements, Risk Assessments etc... as SI8 are Precast Elemental Designers Only. If any queries arise please consult SI8.

Notes

- Job Title: STB1A
- Product: Chamber Type 1.0m internal height
- Date: 05/11/2025
- Version: P01
- All dimensions in mm.
- Kraso Slip on Sleeves to be used
- Caswick SS404 Steps to be used. (Steps always on face with no opes)
- Fibre Lite - FL90 to be used
- Please see reinforcement production drawing for bar schedules, concrete mix, cover, lifting and all other info.
- Do not scale this drawing.
- C40/50 with 400kg/m3 of CEMIIIA (36% GGBS) and 0.45 for W/C ratio for a 50year design life with exposure classes XC4/XF1 and Chemical class XA3T results in 35mm nominal cover.
- PLEASE NOTE: Preformed Ducts or Pockets are to be protected from water ingress where there is a risk of frost damage occurring. Susceptible Ducts should be checked regularly for the presence of water & or ice, whether in storage or on site. Water or ice within the Ducts should be removed immediately. Once units are delivered to site it is the responsibility of the contractor to protect & monitor the Ducts.



Drawing No: STB1A-1.1-C-TYPE1-SDT-01 P01

Ope Legend (diameter × count)
● 160 mm × 2





• Sheet 1/2



Caswick SS404 Steps to be used. (Steps always on face with no opes)

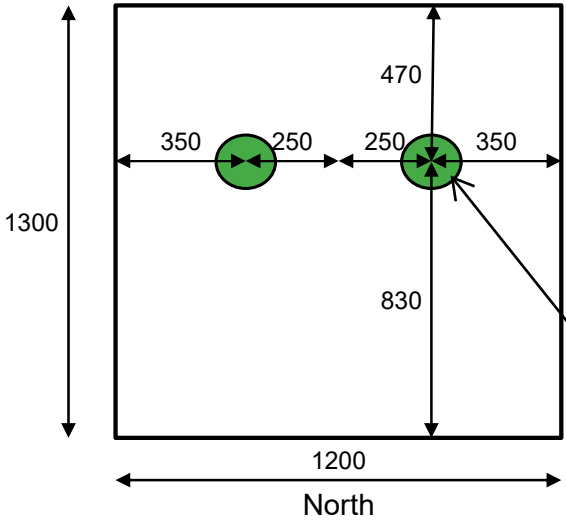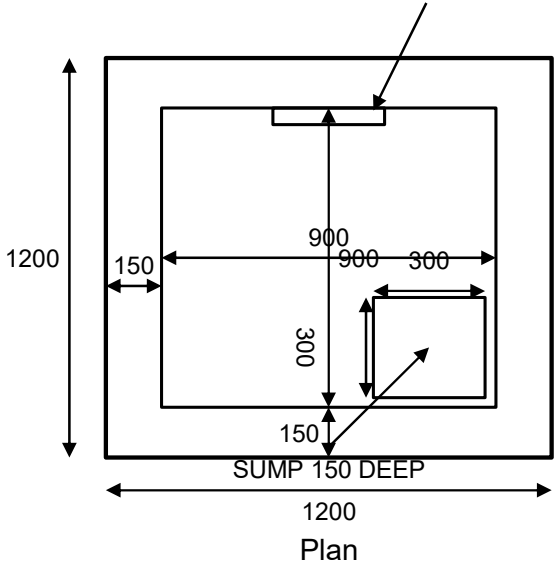


Opes shown indicatively.
Will update when more
information is received.

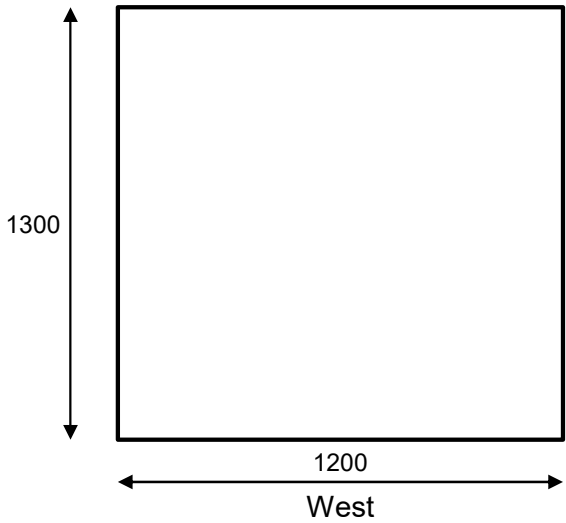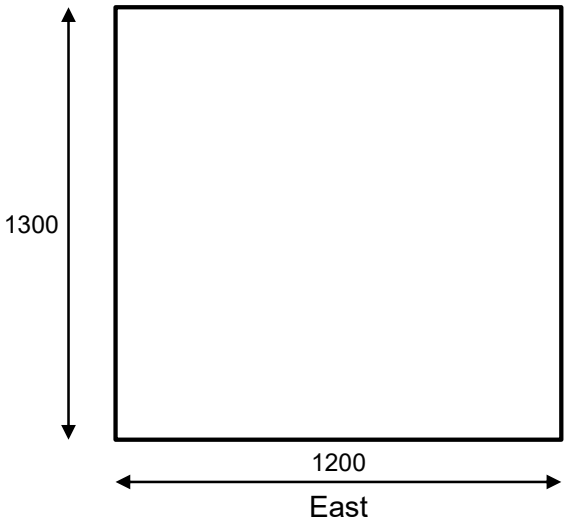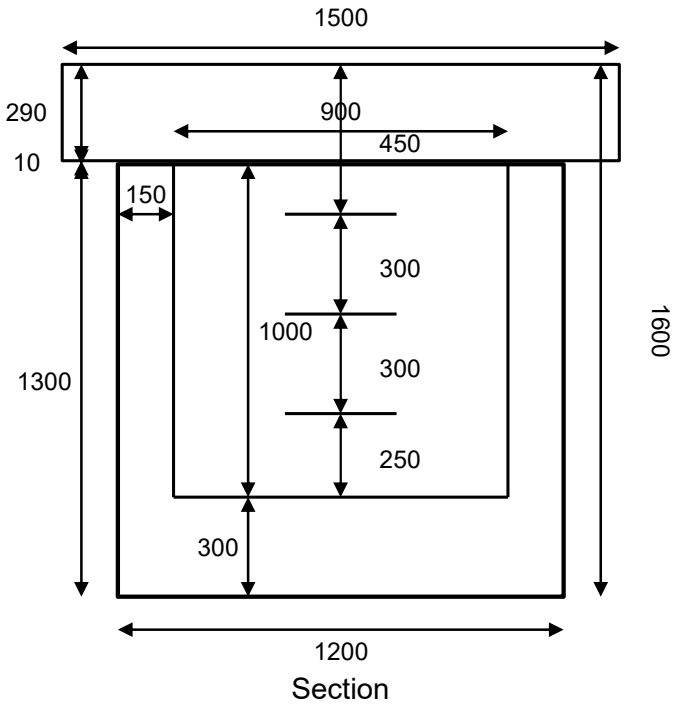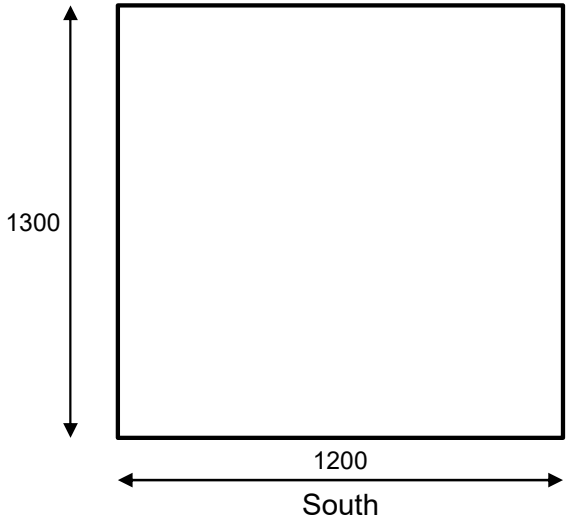




Fibre Lite - FL90

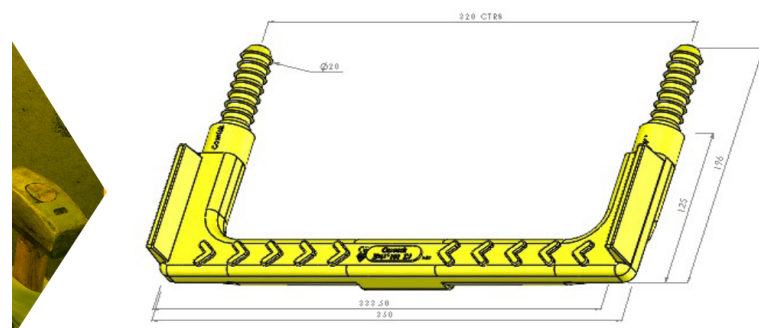


Order Details:

Description	Quantity per Box	Product Code
Step 320 20 x 70 Yellow	22	SS404

Caswick SS404 Steps

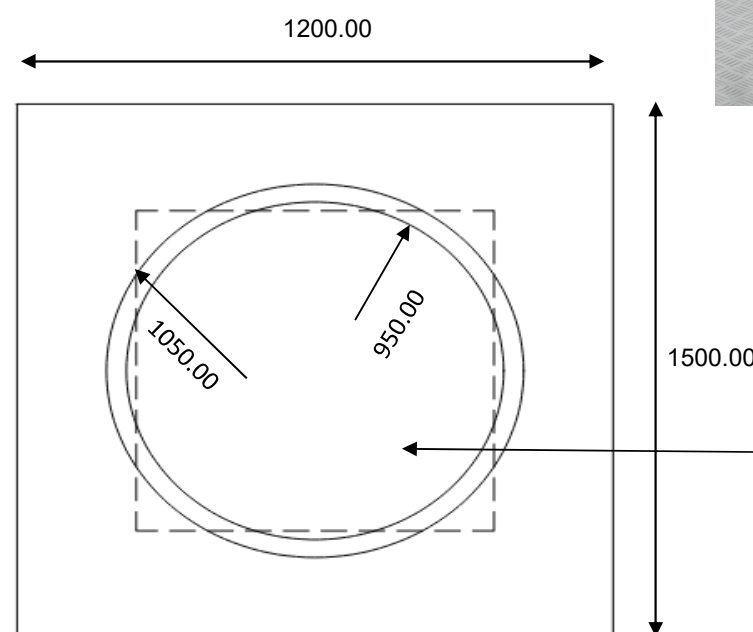


Plan

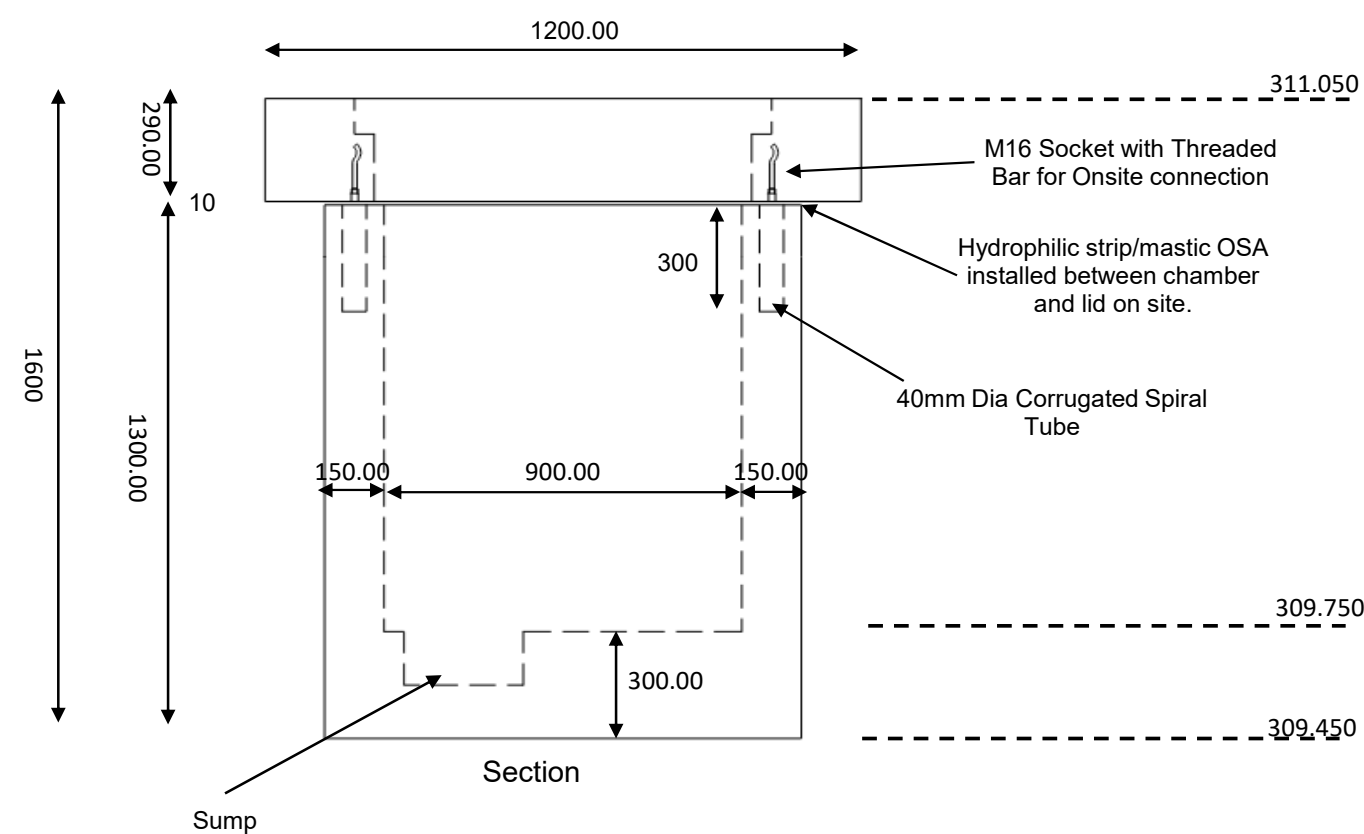

Section



Precast Surface Finish too Lid

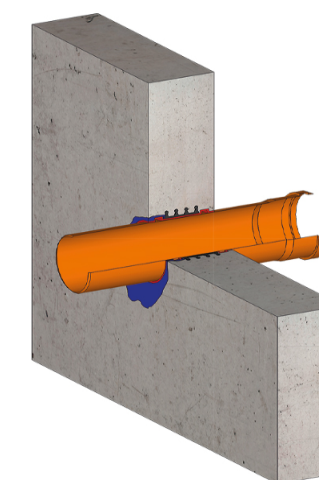

KRASO Slip on Sleeve

Job Title: STB1A

Product: Cham. 1.0m internal height

Date: 05/11/2025

